

HNA02-PHL 2MP Covert Network Camera



HNA02-PHL is the covert camera with 4 optional lens shapes.

Key features including:

Cylindrical, block-shaped, fixed focal and ball-shaped of lens are optional;

2m or 8m (between lens and camera body) cable is optional for flexible installation;

HNA02-PHL 1080p HD resolution for real-time output; Rotate mode, BLC and True WDR are supported for different environment.

Key Features:

- 1/2.7" Progressive Scan CMOS
- Up to 1920×1080@30fps for real-time output
- True WDR, up to 120dB
- PoE supported
- Built-in Micro SD / SDHC / SDXC card slot, up to 128GB
- Support HLC, Defog
- Optional appearance of the front-end(the mini bullet and block) and brackets

Specification


Camera	
Image Sensor	1/2.7" Progressive Scan CMOS
Min. Illumination	0.01Lux @(F1.2, AGC ON); 0.028 Lux @(F2.0, AGC ON)
Shutter Speed	1s to 1/100,000s
Slow Shutter	Support
Lens	L10/L20/10/20: 3.7mm @F2.5, angle of view: 78.5° L30/30: 2.8mm@F2.0, angle of view: 109.4°/ 4mm @F2.2, angle of view: 90°/ 6 mm @F2.0, angle of view: 53.9° (Ingress Protection: IP66) L40: 2.8mm@F2.0, angle of view: 109.4°/ 4mm @F2.2, angle of view: 90°/ 6 mm @F2.0, angle of view: 53.9°/ Fisheye: 1.39mm@F2.0, angle of view: 180° (Ingress Protection: IP66)
Lens Mount	M12
WDR	120dB
DNR	3D Digital Noise Reduction
Length of Lens Cable	Optional 2m or 8m
Compression Standard	
Video Compression	H.264/MJPEG
H.264 Type	Main Profile / High Profile
Video Bit Rate	32 Kbps to 16 Mbps
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM
Audio Bit Rate	64Kbps (G.711)/16Kbps (G.722.1)/16Kbps (G.726)/32 to 160Kbps (MP2L2)
Image	
Max. Resolution	1920×1080
Frame Rate	50Hz: 25fps (1920×1080, 1280×960, 1280×720) 60Hz: 30fps (1920×1080, 1280×960, 1280×720)
Third stream	Independent with main stream, up to 50Hz: 10fps (1280×960); 60Hz: 10fps (1280×960)
Image Setting	Rotate mode(first channel), saturation, brightness, contrast, sharpness and gray scale adjustable
BLC	Yes, zone optional
Defog	Support
Highlight Compensation	Support
Day / Night mode	Auto / Timing / Alarm trigger
Image Overlay	Support 128×128 size BMP with 24-bit depth image overlay, zone optional
ROI	Up to 4 fixed areas in each stream
Network	
Network Storage	Support Micro SD/SDHC/SDXC slot, up to 128GB,Edge recording, NAS (NFS,SMB/CIFS)
Alarm Trigger	motion detection, face detection, dynamic analysis, tampering alarm, network disconnect, IP address conflicts, storage full, storage error, Intrusion detection, Line crossing detection, defocus detection, audio exception detection, scene change detection
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Standard	ONVIF(PROFILE S, PEOFILE G), ISAPI
General	Reset, flickerless, multi-stream, heartbeat, rotate, password protection, video masking, watermark, anonymous login, IP address filtering
Interface	
Communication	1 RJ45 10M/100M Ethernet interface
Audio Interface	1 3.5mm audio in (Mic in/Line in)/out interface
Alarm Input & Output	1-ch alarm input and 1-ch alarm output

General

Working Environment	Temperature :-30 °C to 60 °C (-22 °F to 140 °F) Humidity 95% or less (non-condensing)
Power Supply	12 VDC ± 10%/PoE (802.3af) (Class 3)
Power Consumption	Max. 6.5 W
Dimensions	78×105×32 mm (3.07"×4.13"×1.26")
Shipping Weight	2m cable: <570g 8m cable: <680g
Net Weight	Main body: 210g Cylindrical lens: 113g (2m), 233g (8m) Block-shaped lens: 99g (2m), 220g (8m) Fixed focal lens: 129g (2m), 242g (8m) Ball-shaped lens: 120g (2m), 268.4g (8m) Package + accessories: 224g
Order Model	Different accessories included for each sensor unit:
	HNA02-PHL

Dimension

Turret Bracket

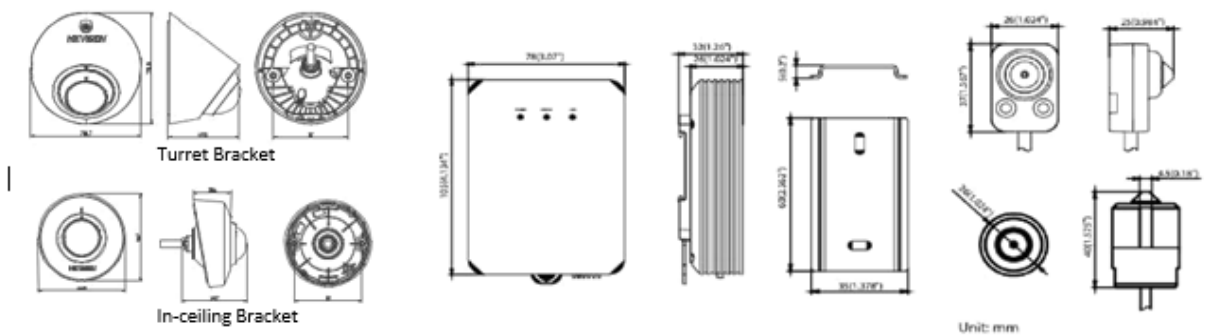

In-ceiling Bracket