

## HNCA01-PC Outdoor Dual Lens People Counting Camera



### smart IPC

HNCA01-PC is a specialized people counting camera, supporting separate counting of people entering, exiting, and passing by.

The camera combines various crucial and advanced technologies, including binocular stereo vision, 3D people detection and tracking, and height filtering, to guarantee high accuracy.

- 1/3" Progressive Scan CMOS
- Dual lens, dual CPU, support stereo views
- 2 mm/2.8 mm/4 mm lens, optional
- Max. resolution 640 × 960
- H.264
- Flash memory storing people counting data
- 3D digital noise reduction
- 12 VDC/PoE
- Up to 5 m IR range
- IP66

## Specifications


<b>Camera</b>	
Image Sensor	1/3" Progressive Scan CMOS
Shutter Speed	1/25 s to 1/10,000 s
Auto-iris	Manual
Digital Noise Reduction	3D DNR
Angle Adjustment	Tilt: 0° to 45°
<b>Lens</b>	
Focal length	2mm, 2.8 mm and 4 mm, optional
Aperture	2.0 mm: F2.2 2.8 mm: F2.0 4 mm: F2.2
FOV	2 mm: horizontal FOV 105°, vertical FOV 89° 2.8 mm: horizontal FOV 83°, vertical FOV 68° 4 mm: horizontal FOV 63°, vertical FOV 55°
Lens Mount	M12
<b>IR</b>	
IR Range	Up to 5 m
<b>Compression Standard</b>	
Video Compression	Main stream: H.264 Sub-stream: H.264
H.264 Type	Baseline Profile/Main Profile/High Profile
Video Bit Rate	32 Kbps to 8 Mbps
<b>People Counting</b>	
Statistics	Support separate counting of people entering, exiting, and passing by
Data Uploading	Support real-time uploading and uploading by statistic cycle
Email Report	Daily, weekly, monthly, and annual report supported
Height Filter	Support
<b>Image</b>	
Max. Resolution	640 × 960
Main Stream Max. Frame Rate	50Hz: 25fps (640 × 480) 60Hz: 24fps (640 × 480)
Sub-stream Max. Frame Rate	50Hz: 25fps (640 × 960) 60Hz: 24fps (640 × 960)
Image Enhancement	3D DNR
Image Setting	Brightness and sharpness are adjustable by client software or web browser
Day/Night Switch	Auto, scheduled, day, and night
<b>Network</b>	
Alarm Trigger	Video tampering, alarm input, alarm output, network disconnected, IP address conflict, illegal login
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour
General Function	Anti-flicker, heartbeat, password protection, watermark, email data report
API	ISAPI, RS-485, HTTP
Simultaneous Live View	Up to 6 channels
User/Host	Up to 32 users

	3 levels: Administrator, Operator and User
Client	iVMS-4200
Web Browser	IE8+, Chrome31-44, Firefox 30.0 - 51
<b>Interface</b>	
Communication Interface	1 RJ45 10M/100M Ethernet port 1 RS-485 interface
Alarm	2 inputs, 1 output (up to 24 VDC 1 A, or 110 VAC 500 mA)
<b>General</b>	
Operating Conditions	-30°C to +60°C (-22 °F to +140 °F), Humidity 95% or less (non-condensing)
Power Supply	12 VDC ± 25%, terminal block PoE (802.3af, class 3)
Power Consumption and Current	12 VDC, max. 7 W, 0.6A PoE(802.3af, 36 V to 57 V), max. 7 W, 0.2 A to 0.13 A
Protection Level	IP66
Material	Body: metal; enclosure: plastic
Dimensions	Camera: 226 × 88 × 64 mm (8.88" × 3.48" × 2.50") Package: 260 × 125 × 125 mm (10.24" × 4.92" × 4.92")
Weight	Approx.850 g (1.87 lb.), 1050 g (2.31 lb.) with package

## Available Models:

HNCA01-PC

## Dimensions:

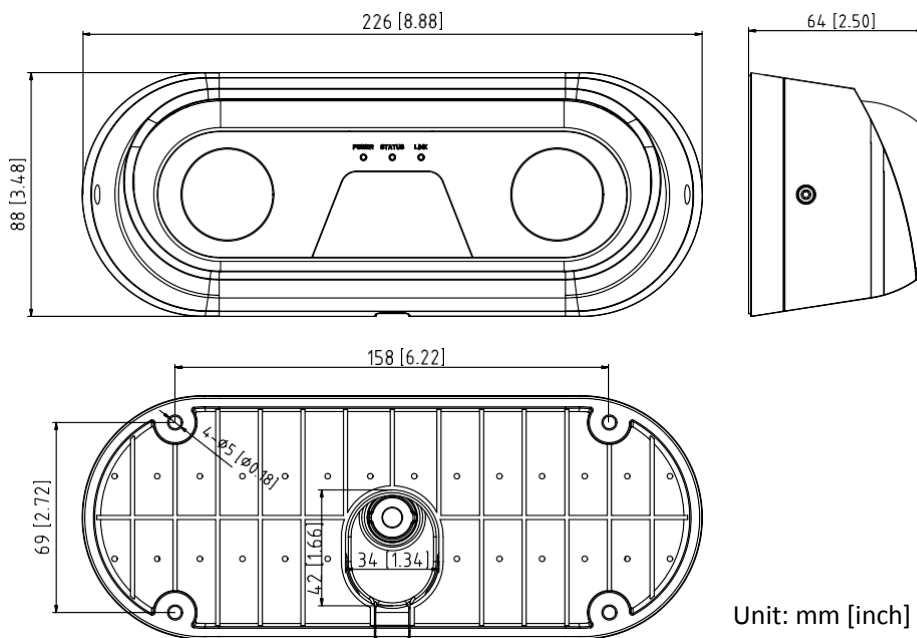


## Accessories:



HTH-275ZJ-P1

Horizontal pole mount

## Installation Recommendation

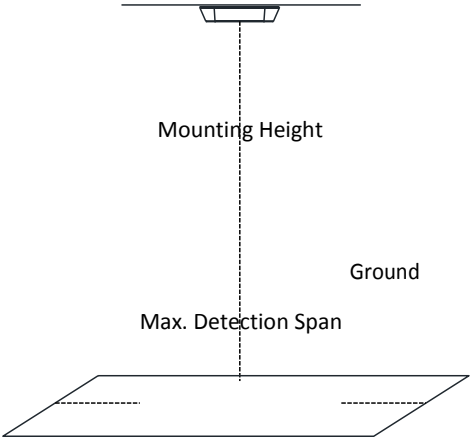	Focal Length (mm)	Mounting Height (m)	Max. Detection Span (m)
 <p data-bbox="316 703 488 734">Mounting Height</p> <p data-bbox="509 846 584 878">Ground</p> <p data-bbox="300 898 504 929">Max. Detection Span</p>	2.0	2.5	1.8
	2.0	3.0	2.9
	2.0	3.5	4.0
	2.0	4.0	5.2
	2.8	3.0	2.2
	2.8	3.5	3.1
	2.8	4.0	4.0
	2.8	4.5	4.8
	2.8	4.7	5.2
	4.0	4.0	2.8
	4.0	4.5	3.4
	4.0	5.0	4.0
	4.0	5.5	4.6
	4.0	6.0	5.2
	<p data-bbox="679 1032 1394 1146">Note: Mounting height of 2.0 mm lens camera should be no higher than 4 meters. Mounting height of 2.8 mm lens camera should be no higher than 4.8 meters.</p>		