




Key Feature

- Premium tempered glass
- Aerospace-grade aluminum
- New UI V2.0: User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- 8.6 mm Ultra-slim design
- Reddot award 2017 winner
- Standard PoE
- Support capture while video calling
- Remote unlocking via the client software or the mobile client
- Views live videos of door stations and linked cameras

Approval


CE-EMC	a. EN 55032:2015 b. EN 61000-3-2:2014 c. EN 61000-3-3:2013 d. EN 50130-4:2011 +A1:2014
CE-LVD	EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013
CB	IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013
FCC-SDOC	47 CFR Part 15, Subpart B
C-TICK(EMC)	AS/NZS CISPR 32:2015
UL	UL 60950-1 & CAN/CSA C22.2 No. 60950-1-07, Information Technology Equipment – Safety – Part 1: General Requirements
IC(EMC)	ICES-003:Issue 6
ROHS	2011/65/EU
REACH	Regulation (EC) No 1907/2006
WEEE	2012/19/EU

Typical Application

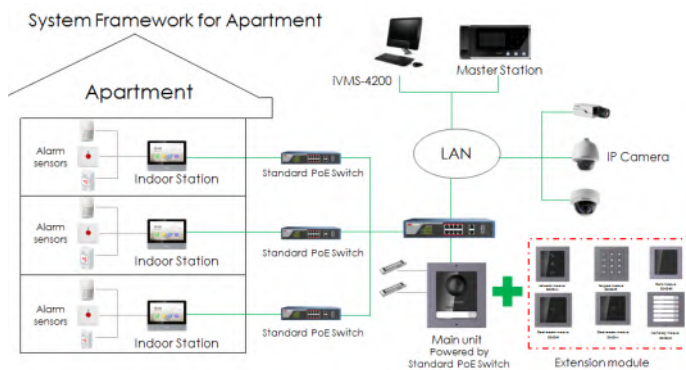


Specification

System parameters	
Memory	128 MB
Flash	32 MB
Operation system	Embedded Linux operation system
Display parameters	
Display screen	7-inch colorful TFT screen
Display resolution	1024 × 600
Operation method	Capacitive touch screen
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression standard	G.711 U
Audio compression rate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Network parameters	
Wired network	10/100 Mbps self-adaptive
Network protocol	TCP/IP, SIP, RTSP
Network interface	1 RJ-45 10/100 Mbps self-adaptive
Alarm input	8-ch alarm inputs
I/O output	2
TF card	Max to 32 G, SD 2.0 or lower version
RS485	Supported
General	
Power supply	IEEE802.3af, standard PoE 12 VDC/1 A
Power supply via detector	12 V, 200 mA
Power consumption	≤ 7 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimensions	180 mm × 140 mm × 22.4 mm (7.09" × 5.51" × 0.88")
Weight	786 g (with packaging) 600 g (without packaging)
Certification	FCC, IC, CE, C-TICK, ROHS, REACH, WEEE, UL, CB, RCM

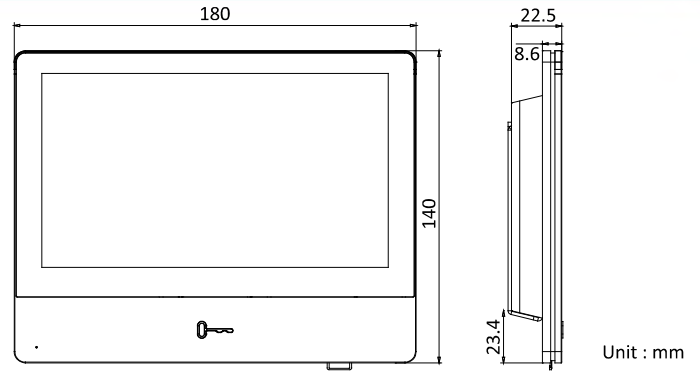


Appearance and Interfaces

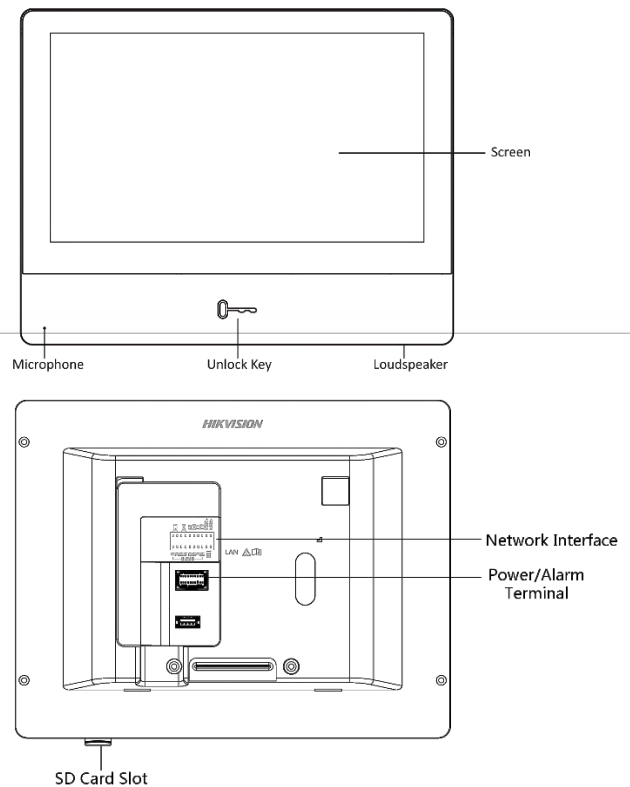

Accessory

Installation



Surface Mounting

Available Model

PKH8350-T

Dimension