

PDB301-VP IP Video Intercom Vandal-Resistant Door Station

Key Features

Basic Functions

- Video intercom function, supporting the communication with the master station, and the indoor station
- Access control function, supporting multiple door opening modes (indoor station, master station, client software, and web)
- Self-adaptive IR supplement with max. 5-meter IR distance
- High-performance embedded SOC processor
- IK 9 and IP 66

Video/Audio Functions

- HD video surveillance with WDR wide angle and high performance CMOS, up to 720P @ 30 fps
- Noise suppression and echo cancellation
- H.264 video compression standard
- Low illumination

Alarm Functions

- Supports the door magnetic alarm
- Auto-uploads alarm messages to the master station or the client software

Remote Controls

- Remote reboot, remote upgrade, time synchronization via NTP, and batch configuration function
- Supports Web remote access and OSD display
- Supports motion detection

Additional Features

- ISAPI (Internet Server Application Programming Interface) and ONVIF (Open Network Video Interface Forum) supported, to ensure greater compatibility and interoperability among different platforms
- Supports bit rate and frame rate configuration, P/N video standard configuration, Email configuration, and auto day & night switch
- Auto-uploads captured pictures to the FTP or the client software while unlocking the door



Specifications


Model		PDB301-VP
System parameters	Processor	High-Performance Embedded SOC Processor
	Operation system	Embedded Linux Operation System
Camera parameters	Image sensor	1/3" Progressive Scan CMOS, Color, Day/Night
	Light sensitivity	Low Illumination
	Lens	Pinhole, f3.47mm,F2.5
	Field of view	80° (Horizontal), 44° (Vertical)
	Field of view adjustment	-50° to 50°
Video parameters	Video compression standard	H.264
	Video streaming	Dual Stream
	Resolution	Main Stream: 1280 × 720 Sub-Stream: 640 x 480
	Video frame rate	PAL: 25 fps, NTSC: 30 fps
	Video bit rate	Main Stream: 32 Kbps to 4096 Kbps Sub-Stream: 32 Kbps to 2048 Kbps
	Anti-flicker frequency	50 Hz, 60 Hz
	Wide dynamic range	Digital WDR, Auto-Switch, DAY/ON, NIGHT/OFF
	Image settings	Color, Brightness, Contrast, Sharpness, Saturation, Video Standard, OSD Display
Audio parameters	Audio streaming	Two-Way, Full Duplex
	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio compression standard	G.711 U
	Audio compression rate	64 Kbps
	Audio quality	Noise Suppression and Echo Cancellation
Light supplement	Light supplement mode	IR Supplement, IR Distance: 5 Meters
	Wavelength	940 nm
	Control	Auto ON/OFF, Time ON/OFF

Model	PDB301-VP	
Network parameters	Ethernet	10/100 Mbps Self-Adaptive Ethernet
	Network protocol	RTSP, RTP, ONVIF, ISAPI, NTP, HTTP, HTTPS, DHCP, FTP, SMTP
	Network connection mode	DHCP, Static IP Address
	Door-unlocked duration	1 s to 255 s
Alarm parameters	Alarm input	Door Magnetic Alarm
Device interfaces	Network interface	1 RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface
	I/O input	1
	I/O output	1 Relay Output
Event actions	Event	Motion Detection, Picture Capturing, Call Button Pressing
	File uploading	FTP
	Email notification	Login Succeeded via Software or Web
General	Material	Wall Mounting Shield: Zinc Alloy Front Panel: Zinc Alloy Rear Panel: Aluminum Alloy Wall Mounting Plate: Secc
	Impact protection	IK 9
	Ingress protection level	IP 66
	Power supply	PoE (Power over Ethernet)
		12 VDC
	Power consumption	Max. 12 W
	Working temperature	-30° C to +50° C (-22° F to 122° F)
	Working humidity	10% to 90%
	Video management software	CMS Client/Guarding Vision Mobile App. For more information, see http://pv.teleco.com/Software/
	Dimensions (L x W x H)	161.9 mm x 74.1 mm x 53.2 mm (6.37" x 2.92" x 2.09")
Weight	773g (1.70lb)	


Available Model

PDB301-VP

Typical Application

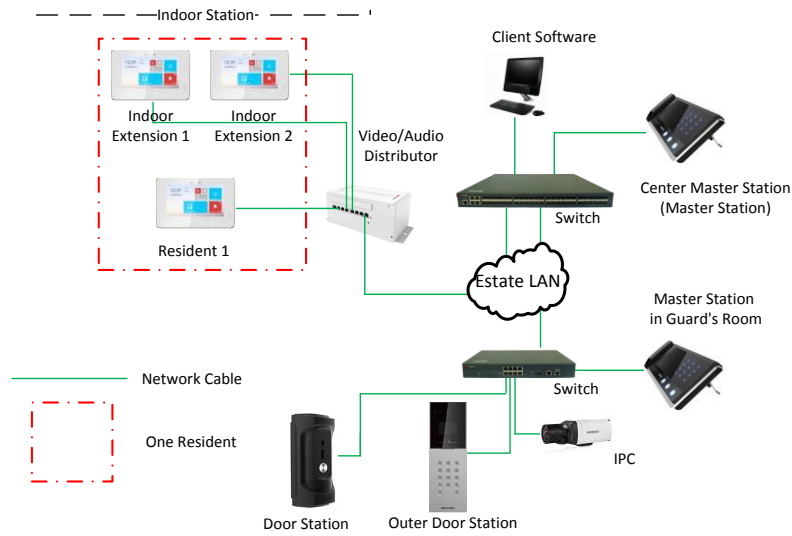

Appearance and Interfaces

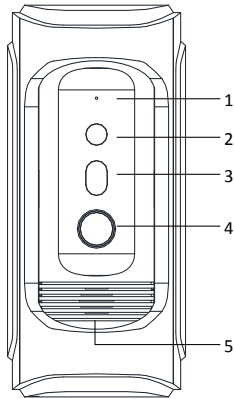

Index	Description
1	Microphone
2	Built-in Camera
3	IR Supplement Light
4	Call Button
5	Loudspeaker