

## HAC334-ODB

### HD1080P WDR Vandal Proof EXIR Dome Camera




#### Key Features

- 2 Megapixel high-performance CMOS
- Analog HD output, up to 1080P resolution
- 3.6mm/6mm lens
- True Day/Night
- OSD menu, DNR, Smart IR
- True WDR, up to 120dB
- EXIR technology, up to 20m IR distance
- IP66 weatherproof & vandal proof
- Up the Coax

## Specifications

<b>Camera</b>	
Image Sensor	2MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	1928(H)*1088(V)
Min. illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25s to 1/50,000s
Lens	3.6mm/6mm optional @ F1.2
Lens Mount	M12
Day & Night	ICR
Angle Adjustment	Pan: 0° - 340°; Tilt:0° - 75°; Rotate: 0° - 355°
Synchronization	Internal Synchronization
WDR	120dB
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 Analog HD output
S/N Ratio	>62dB
<b>Menu</b>	
AGC	Support
D/N Mode	Color/BW/SMART
White Balance	ATW/ MWB
BLC	Support
Functions	Wide Dynamic Range, Digital noise reduction, Mirror, SMART IR
<b>General</b>	
Operating Conditions	-40 °C – 60 °C (-40 °F – 140 °F), Humidity 90% or less (non-condensing)
Power Supply	12 VDC ± 15%
Power Consumption	Max. 5W
Protection Level	IP66
IR Range	Up to 20m
Impact Protection	IK10
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)
Dimensions	φ111mm×82.5mm (φ0.43"×3.25")
Weight	Approx. 350g ( 0.77lb)

## Dimensions

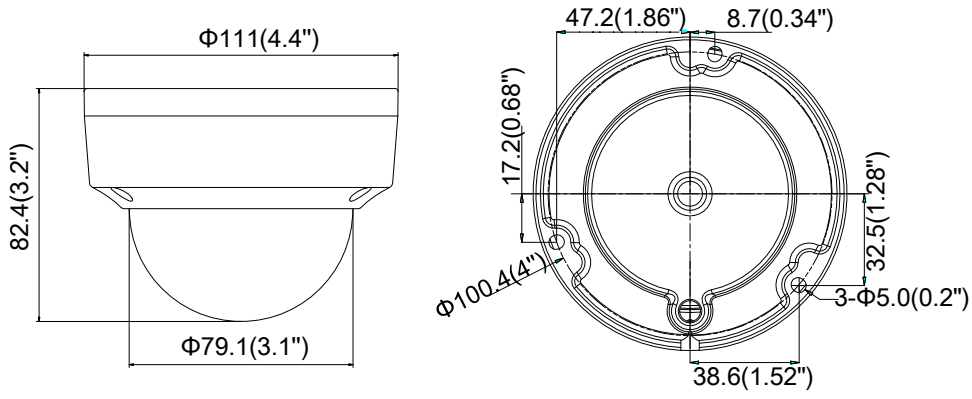

Unit: mm

## Accessories



HTH-271ZJ-110  
Pendant Mounting



HTH-272ZJ-110B  
Wall Mounting



HTH-280ZJ-DM18  
Junction Box



HTH-258ZJ  
Wall Mounting



HTH-1H18  
Video Balun