



## Features and Functions



### Appearance Design

- Typical chassis design to guarantee the low noise and environmental protection of the device
- Front slot of DVD-R/W for more convenient installation and maintenance

### Video Input and Transmission

- Connectable to HDTVI, AHD and analog cameras
- Up to 10/18-ch 8 MP IP cameras input for PAR515-8/PAR515-16
- Long distance transmission over UTP and coaxial cable

### Compression and Recording

- One-key enable H.264+ compression to improve encoding efficiency by up to 50% and reduces data storage costs
- Full channel recording at up to 3 MP resolution
- Supports POS triggered recording and POS information overlay

### Video Output

- Simultaneous HDMI1 and VGA output at up to 1920 × 1080 resolution, and independent HDMI 2 output at up to 4K (3840 × 2160) resolution
- Independent CVBS output improves compatibility at the most possibility and serves as the aux output or live view output only

### Storage and Playback

- Four SATA interfaces (up to 6 TB capacity per HDD)
- Hot-swappable HDD supporting RAID 0, RAID 1, RAID 5, RAID 6 and RAID 10 storage scheme
- 4/8/16-ch synchronous playback
- Smart search for efficient playback
- Supports playback by main stream, or sub-stream for IP cameras
- Supports the 3<sup>rd</sup> party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

### Smart Function

- Supports multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Supports line crossing detection and intrusion detection of all channels
- Supports people counting and heat map functions for 1-ch analog camera
- VQD (Video Quality Diagnostics)
- Unlock pattern for device login for the *admin* and clear-text password available
- GUID file can be exported for password resetting and imported for finding the forgotten password
- Supports PTZ control via Omnicast VMS of Genetec protocol


### Network & Ethernet Access

- Hik Cloud P2P & HiDDNS (Dynamic Domain Name System) for easy network management
- Two gigabit Ethernet network interfaces
- Output bandwidth limit configurable

## Specifications

Model			PAR515-8	PAR515-816
<b>Video/Audio input</b>	<b>Video compression</b>	H.264+/H.264		
	<b>Analog video input</b>		8-ch	16-ch
	<b>HDTVI input</b>	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection		
	<b>AHD input</b>	3 MP, 1080p25, 1080p30, 720p25, 720p30, 720p50, 720p60		
	<b>CVBS input</b>	720p25, 720p30, 1080p25, 1080p30		
	<b>CVBS input</b>	Support		
	<b>IP video input</b>	Up to 8 MP resolution	2-ch (up to 10-ch)	2-ch (up to 18-ch)
	<b>IP video input</b>	H.265/H.264+/H.264		
	<b>Network bandwidth</b>	200 Mbps	260 Mbps	
	<b>Audio compression</b>	G.711u		
<b>Audio input</b>	4-ch, RCA (2.0 Vp-p, 1 KΩ)			
<b>Video/Audio output</b>	<b>CVBS output</b>	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480		
	<b>HDMI1/VGA output</b>	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	<b>HDMI2 output</b>	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	<b>Encoding resolution</b>	3 MP/1080p/720p/WD1/4CIF/VGA/CIF		
	<b>Frame rate</b>	Main stream: 3 MP@15fps; 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF/QVGA/QCIF@25fps (P)/30fps (N)		
	<b>Video bit rate</b>	32 Kbps to 10 Mbps		
	<b>Audio output</b>	2-ch, RCA (Linear, 1 KΩ)		
	<b>Audio bit rate</b>	64 Kbps		
	<b>Dual stream</b>	Support		
	<b>Stream type</b>	Video, Video & Audio		
	<b>Synchronous playback</b>		8-ch	16-ch
	<b>Network management</b>	<b>Remote connections</b>	128	
<b>Network protocols</b>		TCP/IP, PPPoE, DHCP, Hik Cloud P2P, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF, SNMP		
<b>Hard disk</b>	<b>SATA</b>	4 SATA interfaces		
	<b>eSATA</b>	Support		
	<b>Capacity</b>	Up to 6 TB capacity for each disk		
<b>Disk array</b>	<b>Array type</b>	RAID 0, RAID 1, RAID 5, RAID 6, RAID 10		
<b>External interface</b>	<b>Two-way audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ) (independent)		
	<b>Network interface</b>	2, RJ45 10M/100M/1000M self-adaptive Ethernet interface		
	<b>USB interface</b>	Front panel: 2 × USB 2.0 Rear panel: 1 × USB 3.0		
	<b>Serial interface</b>	RS-232, RS-485 (full-duplex), Keyboard		
	<b>Alarm in/out</b>	16/4		
<b>General</b>	<b>Power supply Consumption (without HDD)</b>		≤ 45 W	≤ 65 W
	<b>Working temperature</b>	-10 °C to +55 °C (14 °F to 131 °F)		
	<b>Working humidity</b>	10% to 90%		
	<b>Dimensions (W × D × H)</b>	445 × 390 × 70 mm (17.5 × 15.4 × 2.8 inch)		
	<b>Weight (without HDD)</b>	≤ 5 kg (11.0 lb)		

## Physical Interfaces

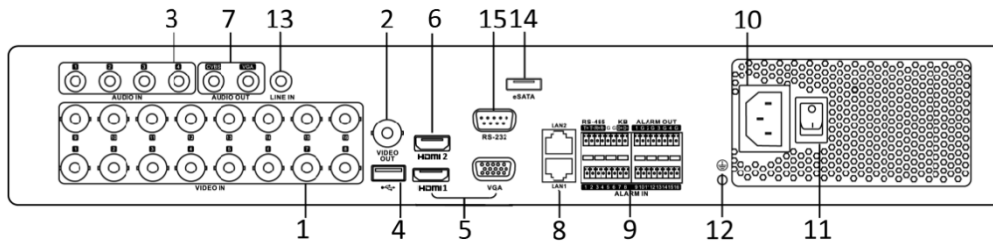

### NOTE

The rear panel of PAR515-8 provides 4/8 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	9	RS-485 Serial Interface, Keyboard Interface, ALARM IN and ALARM OUT
2	VIDEO OUT	10	100 to 240 VAC Power Input
3	AUDIO IN, RCA Connector	11	Power Switch
4	USB Interface	12	GND
5	HDMI1/VGA Interface	13	LINE IN
6	HDMI2 Interface	14	eSATA Interface
7	CVBS AUDIO OUT and VGA AUDIO OUT	15	RS-232 Serial Interface
8	LAN1 and LAN2 Network Interfaces		