

PKB-1004KI Keyboard



Overview

PKB-1004KI keyboard can be used to control the DVR, the analog dome, the video management platform and the analog matrix. The keyboard is featured in its steady and friendly operation.

key Features


- Switch the keyboard mode by key;
- Control the DVR, Dome Camera, VMS and Analog Matrix;
- DVR menu control function;
- PTZ control;
- Setting and calling the preset, patrol, and pattern;
- Switch the TV wall display and set the TV wall layout;
- Video switch control for the analog matrix;
- 16 auxiliary keyboards can be cascaded.

Model: PKB-1004KI

Specification

Model	PKB-1004KI
Joystick	4-axis
Serial Port	RS-485 and RS-232
Working Temperature	10 °C~55 °C (14 °F~131 °F)
Working Humidity	10%~90%
Power Supply	12V DC
Power Consumption	≤10W
Dimension (W × D × H)	434 × 163 × 43mm (17.09" × 6.42" × 1.69")
Weight	≤1.25 Kg (2.76lb)

Typical Application

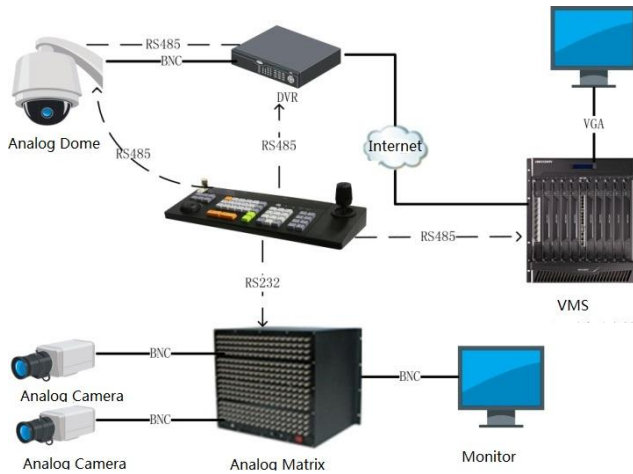

Physical Interface

