

PNC324-CU

4.0 MP WDR Network Cube Camera



Key Features

- Up to 4.0 megapixel high resolution
- Two video streams
- 2.8mm/2mm/4mm fixed lens
- 120 dB Wide Dynamic Range
- 3D Digital Noise Reduction
- Support on-board storage, up to 128GB
- Build-in microphone and speaker, support two-way audio
- DC12V & PoE (802.3af)
- Up to 10 m IR range
- Alarm I/O
- Support PIR (Passive Infrared Detection)
- Built-in Wi-Fi
- Mobile Monitoring via HIK-Connect or iVMS-4500

Specifications

Camera		
Image Sensor	1/2.8" Progressive Scan CMOS	
Min. Illumination	0.01Lux @ (F1.2, AGC ON), 0 Lux with IR	
Shutter Speed	1/3 s to 1/100,000 s	
Lens	2.8 mm, horizontal field of view 105.8° [2.0 mm (126°), 4 mm (83°), optional]	
Lens Mount	M12	
Day & Night	IR cut filter with auto switch	
DNR	3D DNR	
Wide Dynamic Range	Digital WDR	
Compression Standard		
Video Compression	H.264/H.264+/MJPEG	
H.264 Type	BaseLine Profile/Main Profile	
Video Bit Rate	32 Kbps – 8 Mbps	
Dual Streams	Support	
Audio Bit Rate	G.711/G.722.1/G.726/MP2L2	
Audio Compression	64Kbps(G.711)/16Kbps(G.722.1)/16Kbps(G.726)/32-128Kbps(MP2L2)	
Image		
Max. Resolution	2688 × 1520	
Max. Frame Rate	Main Stream	50Hz: 20fps (2688 × 1520), 25fps (1920 × 1080, 1280×720) 60Hz: 20fps (2688 × 1520), 30fps (1920 × 1080, 1280×720)
	Sub Stream	50Hz: 20fps (640 × 360, 352 × 288) 60Hz: 15fps (640 × 360, 352 × 240)
Image Settings	Support rotate mode, brightness, saturation, sharpness, contrast are adjustable via web browser and client software	
Day/Night Switch	Support auto, scheduled, and triggered by alarm input	
Others	Mirror, Wide Dynamic Range (WDR), (Backlight Compensation)BLC, (Region of Interest) ROI	
Network		
Network Storage	Support Micro SD/SDHC/SDXC card (up to 128 GB) local storage and NAS (NFS,SMB/CIFS), ANR	
Detection	Intrusion Detection, Line Crossing Detection, Motion Detection, Dynamic Analysis	
Alarm Trigger	Tampering Alarm, HDD Full, HDD Error, Network Disconnected, IP Address Conflicted, Illegal Login	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6	
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI	
General Function	One-key reset, Anti-flicker, Dual Streams, Heartbeat, Password Protection, Privacy Mask, Watermark, IP Address Filtering	
Interface		
Communication Interface	1 RJ45 10M/100M Ethernet port	
On-board Storage	Built-in Micro SD/SDHC/SDXC slot, up to 128GB	
Audio Interface	1build-in Mic, 1 build-in speaker	
Alarm	1 alarm input, 1 alarm output	
Reset	Yes	
Wi-Fi		
Wireless Standards	IEEE802.11b, 802.11g, 802.11n	
Frequency Range	2.4 GHz ~ 2.4835 GHz	


Channel Bandwidth	20/40MHz Support
Protocols	802.11b: CCK, QPSK, BPSK, 802.11g/n: OFDM
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS
Transmit Output Power	11b: 17±1.5dBm @ 11Mbps 11g: 14±1.5dBm @ 54Mbps 11n: 12.5±1.5dBm
Reception Sensitivity	11b: -90dBm @ 11Mbps (Typical) 11g: -75dBm @ 54Mbps (Typical) 11n: -74dBm (Typical)
Transfer Rates	11b: 11Mbps, 11g: 54Mbps, 11n: up to 150Mbps
Wireless Range	50 meters (The performance varies based on actual environment)
General	
Operating Conditions	-10 °C – 40°C (14 °F – 104 °F), Humidity 95% or less (non-condensing)
Power Supply	DC12V ± 10%, PoE (802.3af)
Power Consumption	Max. 5W
PIR	Angle: 90°, Range: 8m
IR Range	Approx. 10 meters
Dimensions	2.8mm, 4mm lens: 72.3 × 91.9 × 131.3mm (2.85" × 3.62" × 5.17") 2mm lens: 72.3 × 88.6 × 131.3mm (2.85" × 3.49" × 5.17")
Material	Plastic
Weight	Approx. 400g (0.88lbs)

Ordering Models



PNC324-CU

Dimensions

Lens: 2.8mm, 4mm

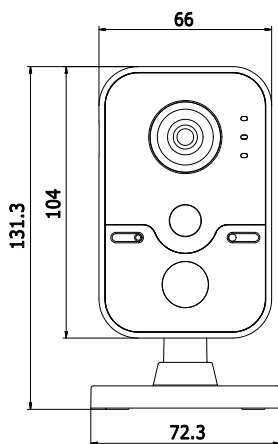

Lens: 2mm

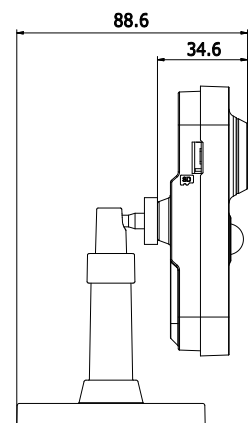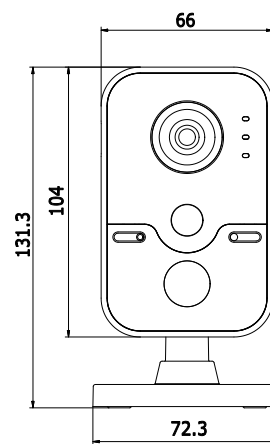

UNIT: mm

